

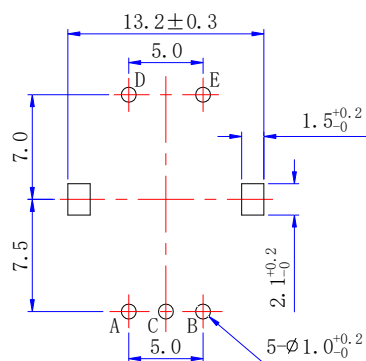
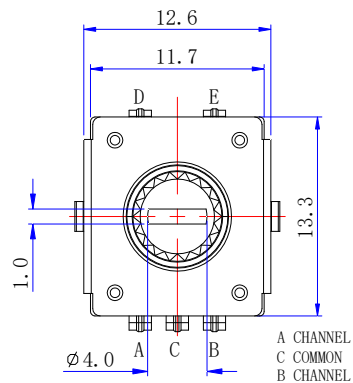
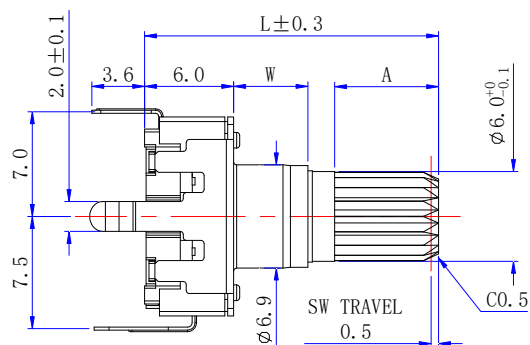
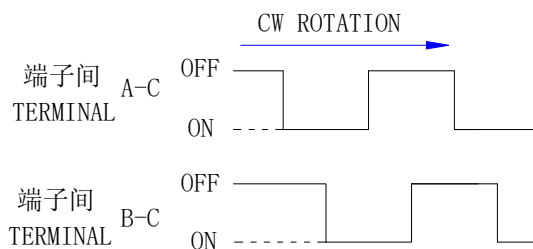





P. C. B MOUNTING
HOLE DETAIL




输出信号波形图
OUTPUT SIGNAL WAVEFORM FIGURE

Y-TYPE (PLASTIC)

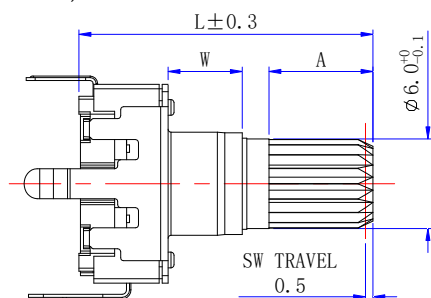

L	12.5	15	15	17.5	20	22.5	25	33
W	1.6	5	1.6	5	5	5	5	5
A	3.5	3.5	5	5	7	7	12	12

F-TYPE (PLASTIC)

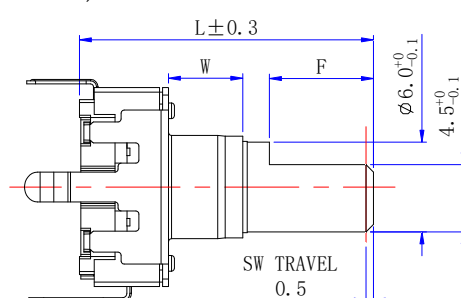

L	12.5	15	15	17.5	20	22.5	25	33
W	1.6	5	1.6	5	5	5	5	5
F	3.5	3.5	5	5	7	7	12	12

3

2

1

SYMBOL

DESIGN

MODEL	EC1202S-D1 (D5)		VERSION	A	TOLERANCE	
DRAWING NO	CPT-EC012-001		SCALE	1:1	L≤10	±0.3
APPROVAL	CHECK	DRAWN	UNIT	mm	10<L≤10	±0.5
					100≤L	±0.8
					ANGULAR	±5°

EC12(S)系列规格书

EC12(S) SERIES SPECIFICATIO

1.一般事项General

1-1.适用规格 Scope

本规格书适用于微小电流回路的电子设备, 属12型回转型编码器.

This specification applies to 12mm size low-profile rotary encoder(incremental type) for microscopic current circuits, used in electronic equipment.

1-2.标准状态Standard atmospheric conditions

除另有规定外, 测量应在以下状态下进行:

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and test is as following limits:

温度 Ambient temperature : 15°C to 35°C

相对湿度 Relative humidity : 25% to 85%

气压 Air pressure : 86kpa to 106kpa

如果对在上述所提到的条件中所做的实测值有疑问的话, 应使用以下条件进行测量:

If doubt arises on the dedision based on the measured values under the above-mentioned conditions, the following conditions shall be employed:

温度 Ambient temperature : 20±1°C

相对湿度 Relative humidity : 63% to 67%

气压 Air pressure : 86kpa to 106kpa

1-3.使用温度范围

Operating temperature range : -30°C to +80°C

1-4.保存温度范围

Storage temperature range : -40°C to +85°C

2.构造Construction

2-1.尺寸 Dimensions

见所附成品图 Refer to attached drawing

3.额定值 Rating

3-1.额定电压


Rated voltage: DC 5V

3-2.最大额定电流 (阻抗负载)

Maximum operating current (resistive load)

各相导线 Each lead: 0.5mA(Max 5mA; Min 0.5mA)

公共导线 Common lead: 1mA(Max 10mA; Min 0.5mA)

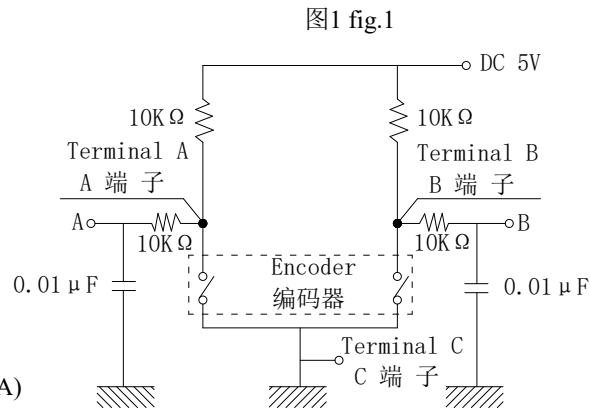

4.编码器使用注意事项 Notes for the Use of Encoders

4-1.避免储藏于高温潮湿及腐蚀的场所.产品购入后尽可能在6个月内使用完.拆包装后未使用完的剩余产品需储藏于防潮防毒的环境下.

Avoid storing the products in a place at high temperature, high humidity and in Corrosive gases. Please use this product as soon as possible with 6 months limitation. If any remainder left after packing is opened, please store it with proper moistureproofing, gasproofing etc.

4-2.编码器信号的计算方法应将操作的速度,信号的取样时间及电子回路中的微电脑软体等考虑进去.

The encoder pulses count method should be designed with taking operating speed, sampling time and esign of the microcomputer software into cosideration.

4-3.此产品在定位点的输出波形参照 (5-1), 因此在设计软体时请留意其状态, 推荐以A相位为参考基准.

With this products the detent position output consult fig.5-1. Therefore make the A phase the reference at the soft ware design stage. redommended that use A output signal for the reference.

4-4.在设计时要考虑到杂讯,建议使用R/C滤波电路,(图1)

At design of the pulse count process. Using the C/R filter circuit is redommended. (fig .1)

4-5.本产品请勿碰触到水,可能会导致输出波形的异常.

Care must be taken not to expose this product to water or dew to prevent possible problem in pluses output waveform.

4-6.开关操作或装配外套钮时, 请避免于轴心施加规定以上的负荷, 否则可能会损坏开关, 造成开关功能失效.

When the switch operates or assembles the jacket button, please avoid imposing more than the specified load on the axle center. otherwise the switch may be damaged and the function of the switch will fail.

4-7.上锡法如下图2, 应尽量避免在PCB板上面非焊接位焊接, 否则加焊时易将焊锡流至产品 塑胶位造成松动或接触不良, 在无法避免且需此焊接工艺时, 请与本公司联络;

If the upper tin method is shown on the fig 2, the non-welded position on the PCB board should be avoided as far as possible. Otherwise, it is easy to flow solder to the plastic position of the product to cause loosening or poor contact when adding solder.

This welding process is unavoidable and necessary. Please contact our company.

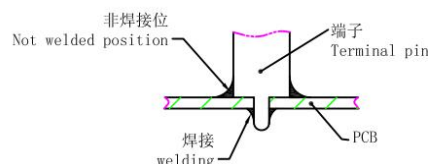
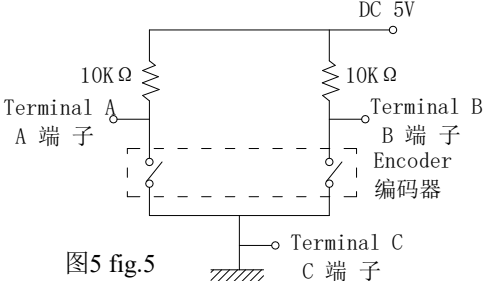
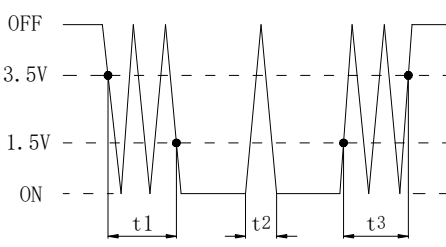


图2 fig.2

EC12(S)系列规格书


EC12(S) SERIES SPECIFICATIO

5.电气性能 ELECTRICAL CHARACTERISTICS

项目 ITEM	条件 CONDITIONS	规格 SPECIFICATIONS
5-1	输出信号 Output signal format	A、B两信号输出相位差，输出波形详见（图3/4）（虚线表示带卡点装置的上擎子处位置） A、B 2 Phase-different signals (signal A,signal B) Details shown in (fig.3/4) (The broken line shows detent position.)
		轴回转方向 Shaft rotational diredtion
		信号 Signal
		输出波形 Output
		12 Phase(fig.3)
		24 Phase(fig.4)
5-2	分解能力 Resolution	回转360°的输出脉冲数. Number of pulses in 360°rotation.
		☐ 12 个脉冲/360°(图3) 12pulses/360°(fig.3) ☒ 24个脉冲/360° (图4) 24pulses/360°(fig.4)
5-3	开关特性 Switching characteristics	下（图5）所示回路，轴以360°/S的速度转动测定。 Measurement shall be made under the condition as follows. Shaft rotational speed : 360°/S Test circuit : (fig.5)  图5 fig.5  图6 fig.6 注:编码OFF指输出电压3.5V以上的状态(fig.6). Code-OFF area :The area which the voltage is 3.5V or more(fig.6). 编码ON指输出电压1.5V以下的状态(fig.6). Code-ON area : The area which the voltage is 1.5V or less(fig.6).
5-3-1	振荡 Chattering	编码从OFF→ON或ON→OFF时,输出1.5V~3.5V的通过时间. 应符合规定. Spedified by the signal's passage time from 1.5V to 3.5V of each switching position(code OFF~ON or ON~OFF) $t_1, t_3 \leq 3\text{ms}$
5-3-2	滑动杂讯 (突跳) Sliding noise (Bounce)	编码ON部份的1.5V以上的电压变动时间在振荡t_1, t_3之间会产生1mS以上,1.5V以下的ON部份.另外,如果各突跳1.5V以下的范围在1mS以上时,则判定为另一个突跳. Spedified by the time of voltage change exceed 1.5V in code-ON area . When the bounce has code'-ON time less than 1mS between chattering ($t_{lor} t_3$)the voltage change shall be regarded as a part of chattering. Whe n the code-ONtime between 2 bounces is less than 1mS.they are regarde d as 1 linked bounce. $t_2 \leq 2\text{mS}$

EC12(S)系列规格书

EC12(S) SERIES SPECIFICATIO

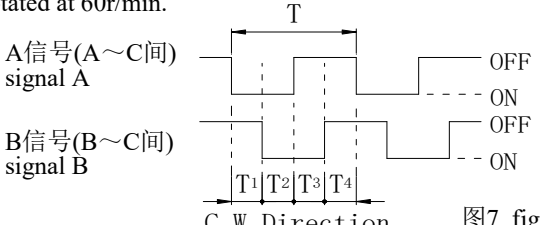项目 ITEM		条件 CONDITIONS	规格 SPECIFICATIONS
5-3-3	滑动噪音 Sliding noise	编码OFF部份的电压变动. The voltage change in code-OFF area.	3.5V以上 3.5Vmin
5-4	相位差 Phase difference	下(图7)所示回路, 轴以360°/S的速度转动测定. Measurement shall be made under the condition which the shaft is rotated at 60r/min.  图7 fig.7	$T1、T2、T3、T4 \geq 0.08T$ 见图7 (fig.7)
5-5	绝缘阻抗 Insulation resistance	在端子和支架间施加电压 250V DC. Measurement shall be made under the condition which a voltage of 250V DC is applied between individual terminals and frame.	100MΩ 以上 100MΩ Min
5-6	耐电压 Dielectric	在端子和支架间施加AC300V电压1分钟. A voltage of 300V AC shall be applied for 1 minute between individual terminals and frame.	不得有绝缘破坏 Without arcing or breakdown.
5-7	端子间接触阻抗 Contact resistance	输出信号处于ON时安定状态条件下测定. Measurement shall be stable condition which a output signal is ON.	1Ω以下 1ΩMax
6.机械性能 MECHANICAL CHARACTERISTICS			
6-1	全回转角度 Total Rotational Angle		360°(无止档点) 360°(Endless)
6-2	定位点力矩 Detent torque	只适用于附卡点装置 Only suitable for C.C,equipment.	2~15mN.m. (20~150gf.cm)
6-3	定位点数及位置 Number and position of detent	只适用于附卡点装置 Only suitable for C.C,equipment.	☐ 12点定位间隔角度 $30^\circ \pm 2^\circ$ 12detents Step angle: $30^\circ \pm 2^\circ$ ☒ 24点定位间隔角度 $15^\circ \pm 2^\circ$ 24detents Step angle: $15^\circ \pm 2^\circ$
6-4	轴的推拉强度 Push-pull Strength of shaft	在轴端,沿轴向施加50N(5Kg)的静负荷力推和拉10秒钟(产品焊锡固定在PCB上.) Push and pull static load of 50N(5Kg) shall be applied to the shaft in the axial direction for 10s.(After soldering of the PC board)	轴向虚位间隙0.4以内 Shaft play in axial direction 0.4 Max
6-5	端子强度 Terminal strength	在任一方向施加5N(500g)负荷10秒钟 A static load of 5N(500g) shall be applied to the terminals for 10S.	端子无损坏,无过度的松动.允许变形. Without damage or excessive looseness of terminals. Terminal bend is permitted
6-6	轴套螺纹紧固强度 Bushing Nut Tighten Strength		7.0kgf.cm以上 7.0kgf.cm Min
6-7	轴向间隙 Shaft play in axial direction		0.4mm 以下 0.4mm Max
6-8	轴摆动 Shaft wobble	在距离轴顶端5mm处,沿径向瞬间施加50mN.m(500gf.cm)的力测试 A momentary load of 50mN.m should be applied at the point 5mm from the tip of the shaft in a direction perpendicular to the axis of shaft.	$0.7 * L / 30mm$ p-p 以下 (L: 指安装平面到轴的柄端的距离.) $0.7 * L / 30mm$ p-p Max L:Distance between mounting surface and measuring point on the shaft
6-9	轴的回转方向摆动 Shaft play in rotational wobble	用角度板测定 Testing by angle board.	5° 以下 5° Max

EC12(S)系列规格书

EC12(S) SERIES SPECIFICATION

项目 ITEM		条件 CONDITIONS	规格 SPECIFICATIONS
7.耐久性能 ENDURANCE CHARACTERISTICS			
7.1	回转寿命 Rotational life	在无负荷条件下轴以600~1000周/小时速度回转，一日连续5000~8000次.The shaft of encoder shall be rotated at a speed of 600~1000cycles/H without electrical load,after with measurements shall be made.(5000 to 8000 continuous cycles for 24 hours.)	☒ 在力矩 $\leq 120\text{gf.cm}$ 时30,000 $\pm$ 200周. 30,000 $\pm$ 200cycles per below 120gf.cm. ☐ 在力矩 $> 120\text{gf.cm}$ 时15,000 $\pm$ 200周. 15,000 $\pm$ 200cycles per above 120gf.cm. 振荡 $t_1, t_3 \leq 5\text{mS}$.突跳 $t_2 \leq 3\text{mS}$. 尚余有轻微定位感. 端子间接触阻抗200 Ω 以下 Chattering $t_1, t_3 \leq 5\text{mS}$.Bounce $t_2 \leq 3\text{mS}$. Detent feeling has to remain Contact resistance 200 Ω Max
7-2	耐寒性 Cold	温度 $-40\pm 2^\circ\text{C}$ 的恒温试验箱内放置96H，拿出后擦干表面水份并在常温下放置1.5H后测试。 The potentiometer shall be stored at a temperature of $-40\pm 2^\circ\text{C}$ for 96 hours in a thermostatic chamber. Then the potentiometer shall be taken out of the chamber and its surface moisture shall be removed and then the potentiometer shall be maintained at standard atmospheric conditions for 1.5 hours,after which measurement shall be made.	所有项应满足初期规格。 Specifications in clause all items is shall be satisfied.
7-3	耐热性 Dry heat	温度 $85\pm 2^\circ\text{C}$ 的恒温试验箱内放置96 $\pm$ 4H，拿出后在常温下放置1.5H后测试。 The potentiometer shall be stored at a temperature of $85\pm 2^\circ\text{C}$ for 96 $\pm$ 4hours in a thermostatic chamber, Then the potentiometer shall be taken out of the chamber and then the potentiometer shall be maintained at standard atmospheric conditions for 1.5 hours,after which measurement shall be made.	所有项应满足初期规格。 Specifications in clause all items is shall be satisfied.
7-4	耐湿性 Damp heat	温度 $40\pm 2^\circ\text{C}$ 、湿度90%~95%的恒温试验箱内放置96 $\pm$ 4H，拿出后擦干水份并在常温下放置1.5H后测试。 The potentiometer shall be stored at a temperature of $40\pm 2^\circ\text{C}$ with relative humidity of 90% to 95% for 96 $\pm$ 4 hours in a thermostatic chamber.then the potentiometer shall be taken out of the chamber and its surface moisture shall be removed and then the potentiometer shall be maintained at standard atmospheric conditions for 1.5 hours,after which measurement shall be made.	所有项应满足初期规格。 Specifications in clause all items is shall be satisfied.
7-5	焊锡性 Solderability	端子在 $260\pm 5^\circ\text{C}$ 温度的焊锡槽内浸锡3 $\pm$ 0.5秒。 The terminals shall be immersed into solder bath at $260\pm 5^\circ\text{C}$ for 3 $\pm$ 0.5S.	浸渍面须有75%以上焊锡附着 A new uniform coating of solder shall cover 75% minimum of the surface being immersed.
7-6	焊锡耐性 Resistance to Soldering heat	槽焊 使用基板: $t=1.6\text{mm}$ 的单面覆铜板。 预热: 基板表面温度 100°C 以下，时间1分钟以内。 焊接: 温度 $260\pm 5^\circ\text{C}$ 或以下，时间3秒以内。 Dip soldering Printed wiring board:single-sided copper clad laminate board with thickness of 1.6mm. Preheating: 1.Surface temperature of board: 100°C or less. 2.preheating time:within 1 minute. Soldering:Solder temperature: $260\pm 5^\circ\text{C}$ or less Immersion time: within 3s. 手工焊接 温度 300°C 以下，时间3秒以内。 Manual soldering Bit temperature of soldering iron: 300°C less than Application time of soldering iron:within 3s.	不得有绝缘体的破损、变形、接触无异常。 Electrical characteristics shall be satisfied no mechanical abnormality.

EC12(S)系列规格书

EC12(S) SERIES SPECIFICATION

推动开关部分

Push Switch Portion

备注：以下规格适用于EC12编码器带开关系列。

Note: Note: The following specification is only suitable for the one type with switch construction series of EC12encoder series.

1.额定值 RATING

1-1.额定电压

Rated voltage:DC 5V

1-2.最大额定电流 (阻抗负载)

Maximum operating current (resistive load):10mA Max

2.电气性能 ELECTRICAL CHARACTERISTICS

项目 ITEM		条件 CONDITIONS	规格 SPECIFICATIONS
2-1	接触电阻 Contact resistance	用 DC5V1mA电压测定。 Voltage test at DC 5V 1mA.	$\leq 100\text{m}\Omega$ 100m Ω or less
2-2	绝缘阻抗 Insulation Resistance	在端子和安装板间施加电压 250V DC. Measurement shall be made under the condition which a voltage of 250V DC is applied between individual terminals and bushing and plank.	100 M Ω 以上 100 M Ω Max
2-3	振荡 Bouncing	以1秒钟1往返(OFF-ON-OFF)按压动作。 Shaft shall be push at 1 cycles/s(OFF-ON-OFF).	$\leq 10\text{mS}$ 10mS or less
2-4	耐电压 Withstand Voltage	在端子和安装板间施加AC300V电压1分钟 A voltage of 300V AC shall be applied for 1 minute between individual terminals and bushing and plank.	不得有绝缘破坏 Without arcing or breakdown.

3.机械性能 MECHANICAL CHARACTERISTICS

3-1	开关电路接点数 Switch circuit and number of pulse		单极单投(按压ON) Single pole and single throw (push ON)
3-2	开关动作力 rotational torque of switch	在轴端，沿轴向施加的按压力。 Push static load to the shaft in the axial direction	600 $\pm$ 300gf
3-3	开关移动量 Travel of switch		0.5 $\pm$ 0.3 mm

4.耐久性能 ENDURANCE CHARACTERISTICS

4-1	开关寿命 Switch-life	在无负荷条件下沿轴向施以1Kg以下的力，以600~1000次/小时的速度按压。 Push 1Kg to the shaft of encoder in the axial direction under non-load conditions, and with a speed of 600~1000 times/hour.	30,000 $\pm$ 200次。 30,000 $\pm$ 200cycles.
			接触电阻: $\leq 200\text{m}\Omega$.其它应满足初期规格。 Contact resistance:200m Ω or less. Specification in clause shall be satisfied.

EC12(S) 系列规格书

EC12(S) SERIES SPECIFICATION

包装 PACKAGING

1. 成品包装方式 PACKING METHOD:

1.1. 将V.R成品置放于单个胶盒内，并将胶盒叠放在一起再用胶纸将其扎好。

Let the V.R be placed into plastic box , and the plastic boxes be superposed one by one and use adhesive tape them together.

1.2. 将扎好之胶盒(共20盘)放置于外箱内,放好后用胶纸将外箱封口。

Let the packed plastic boxes be placed into (20PCS box) of the carton and use adhesive tape to seal.

2. 规格与数量 MEASUREMENT AND QUANTITY:

2.1. 胶盒规格(长×宽×高):300mm×250mm×18mm

Plastic box (length×width×high): 300mm×250mm×18mm

胶 盒
PLASTIC BOX



2.2. 外箱规格(长×宽×高):530mm×285mm×315mm

Carton contain (length×width×high): 530mm×285mm×315mm

2.3. 单个胶盒包装数量: 2×50=100PCS(胶盒每格置放V.R成品2PCS)

A plastic box contain 2×50=100PCS of V.R (every lattice contain 2PCS of V.R)

放于外箱
INTO OF THE CARTON



2.4. 外箱包装V.R成品数量: (100×20)×2=4000PCS

A carton contain(100×20)×2=4000PCS of V.R

受控编号 DOCUMENT No	修订 REVISION	日期 Date	经办 Designed	审核 Check	批准 Approved
	初始发行	2014.12.09			
EC12系列					
版本 VERSION:	A0				